
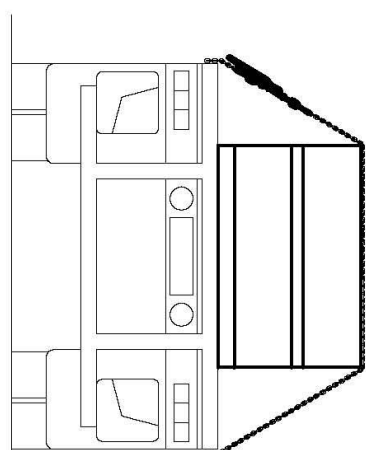
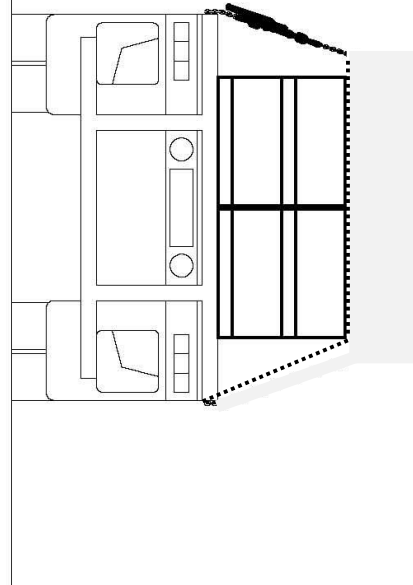


LOAD RESTRAINT OF TEE

Due to safety risks associated with the use of 'overcentre' loadbinders (dog and chain), this type of load restraint equipment must not be used.

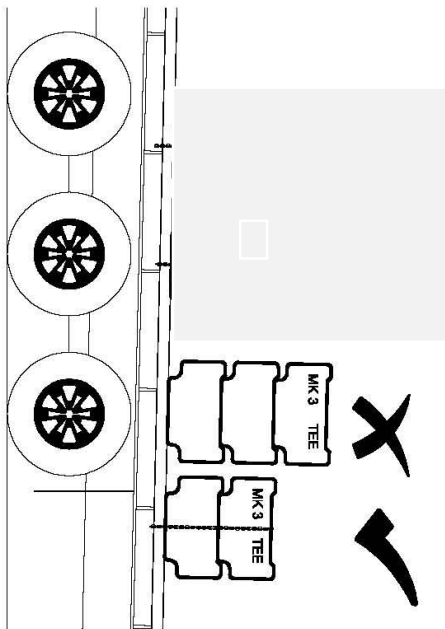

POSITION THE TEES TO ENSURE AXLE WEIGHTS ARE NOT EXCEEDED
POSITION THE TEES EVENLY ACROSS THE DECK
DO NOT STACK MK 3 TEES MORE THAN TWO HIGH
USE AT LEAST ONE 8MM TRANSPORT CHAIN FOR EVERY ROW OF TEES
TENSION THE CHAIN TO 750 KG MIN. USING A SUITABLE TENSIONER
USE EXTREME CARE IF USING A 'DOG'
TRANSPORT CHAIN SHOULD COMPLY WITH AS/NZS 4344

DO NOT USE WEBBING STRAPS TO RESTRAIN THIS PRODUCT

TEES RESTRAINED IN ACCORDANCE WITH THE ABOVE, COMPLY WITH THE PERFORMANCE STANDARDS OUTLINED IN THE LOAD RESTRAINT GUIDE

| | | |
|--|---|---|
| <p>ACN 068 828 133</p>  <p>LOADSAFE LOADSAFE AUSTRALIA PTY. LTD.</p> | <p>DATE OCT 2004</p> <p>APPROVED  R. LARSEN BEMBEH</p> | <p>THE INFORMATION HEREON IS THE PROPERTY OF TOMAGO ALUMINIUM COMPANY PTY LIMITED ANY COPYING, TRANSMITTAL, TO OTHERS AND USE, EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED WITHOUT WRITTEN PERMISSION.</p> |
|  <p>TOMAGO ALUMINIUM Company Pty Limited ALUMINIUM LOAD RESTRAINT STANDARDS TEES</p> <p style="font-size: x-small;">A.C.N. 091 962 228 A.S.N. 95 001 962 228</p> | | |