

**Department**  
Cast Products

**Approver's Title**  
Cast Products Manager

**Author's Title**  
Process Superintendent  
Casting



**TOMAGO ALUMINIUM** Company Pty. Limited

**STANDARD OPERATING PROCEDURE MANUAL  
PRODUCT LOAD RESTRAINT  
TEES (DOMESTIC)  
LOADERS AND DRIVERS**


*Controlled copy on day of printing 5/08/2020 only*

Document No: SOP40a  
DMS: 120000004786  
Version 04

Original date: July 2008  
Previous date: 23/06/17  
Issue date: 31/07/20

Page 1 of 1


**LOAD RESTRAINT OF TEE**

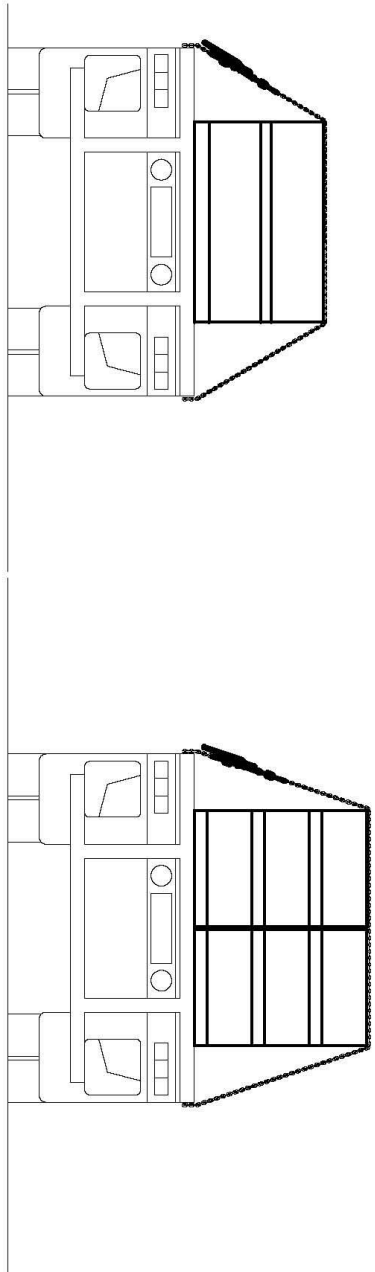

Rubber matting, larger than the T-bar footprint is to be placed under each lift to prevent T-bar from sliding on the truck bed.

POSITION THE TEES TO ENSURE AXLE WEIGHTS ARE NOT EXCEEDED  
POSITION THE TEES EVENLY ACROSS THE DECK  
DO NOT STACK THE TEES MORE THAN TWO HIGH  
USE AT LEAST ONE 8MM TRANSPORT CHAIN FOR EVERY ROW OF TEES  
TENSION THE CHAIN TO 750 KG MIN. USING A SUITABLE TENSIONER  
USE EXTREME CARE IF USING A 'DOG'  
TRANSPORT CHAIN SHOULD COMPLY WITH AS/NZS 4344

DO NOT USE WEBBING STRAPS TO RESTRAIN THIS PRODUCT

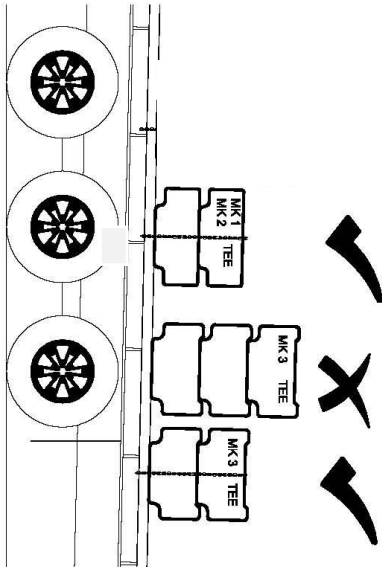

*Comply with the Load Restraint Guide 2018 (LRG) issued by the NTC and Roads & Traffic Authority of New South Wales*

<p><b>LOADSAFE</b> LOADSAFE AUSTRALIA PTY. LTD.</p>	<p>ACN 068 828 133</p>	<p>DATE OCT 2004</p>	<p>THE INFORMATION HEREON IS THE PROPERTY OF TOMAGO ALUMINIUM COMPANY PTY LIMITED ANY COPYING, TRANSMITTAL TO OTHERS AND USE, EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED WITHOUT WRITTEN PERMISSION.</p>	<p><b>TOMAGO ALUMINIUM</b> Company Pty Limited ALUMINIUM LOAD RESTRAINT STANDARDS TEES</p>
	<p>APPROVED R LARSEN BEMBECH</p>	<p>ACN 071 86228 AS/NZS 4344</p>		

Due to safety risks associated with the use of 'overcentre' loadbinders (dog and chain), this type of load restraint equipment must not be used.